



China | Aluminum Doors and Windows Manufacturers

www.miaofengdoors.com | +86 180.2277.5361

PRODUCT CATALOG

SLIDING DOOR SERIES

16 Series Ultra-Slim Sliding Door	5
48 Series Sliding Door.....	5
68 Series Sliding Door.....	6
100 Series Heavy-duty Sliding Door.....	6
120 Series Ultra-slim Sliding Door.....	7
150 Series Ultra-slim Sliding Door.....	7
100 Series Heavy-duty Lift-sliding Door	8
130 Series Ultra-slim Lift-sliding Door.....	8

FOLDING DOOR SERIES

16 Series Ultra-Slim Folding Door	10
68 Series Folding Door	10
73 Series Folding Door	11
75 Series Folding Door	11
80 Series Heavy-duty Folding Door.....	12
120 Series Heavy-duty Folding Door	12

HINGED DOOR SERIES

16 Series Ultra-Slim Hinged Door.....	14
30 Series Hinged Door	14
73 Series Hinged Door	15
75 Series Hinged Door	15

PIVOT DOOR SERIES

18 Series Ultra-Slim Pivot Door.....	17
30 Series Pivot Door	17
55 Series Pivot Door	18
80 Series Heavy-duty Pivot Door.....	18
120 Series Heavy-duty Pivot Door	19

COMMERCIAL STORE FRONT DOOR SERIES

55 Series Commercial Storefront Doors.....21

80 Series Commercial Storefront Doors.....21

COMMERCIAL AUTOMATIC SLIDING DOOR SERIES

Frameless Glass Automatic Sliding Door.....23

18 Series Ultra-slim Automatic Door 23

55 Series Automatic Door.....24

80 Series Automatic Door.....24

WINDOWS SERIES

110 Series Casement Windows.....26

120 Series Casement Windows.....26

120 Series Sliding Windows.....27

128 Series Sliding Windows.....27

110 Series Awning Windows.....28

110 Series Tilt And Turn Window.....28

75 Series Folding Window.....29

Gas Strut Window.....29

Single Double Hung Window.....30

Special-shaped Window Customizable.....30

Picture Window 31

Skylight 31



SLIDING DOOR SERIES



Note:

1. We do not have inventory; all products are custom-made. Production takes approximately 25-30 business days.
2. Our factory supports customizing any profile color and various glass configurations. If you require a different configuration, please contact our experienced sales staff.



WhatsApp
+86 180.2277.5361



WeChat
ID:MiaoFeng2305



16 Series Ultra-Slim Sliding Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Top track or bottom track can be selected

Glass: 8mm clear tempered glass
10mm clear tempered glass
4+1.14PVB+4 laminated tempered glass

Standard Size:

72"*80",
96"*80",
108"*96",
120"*96",
144"*96",
160"*96"



48 Series Sliding Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+12Ar+5mm clear tempered glass

Standard Size:

72"*80",
96"*80",
108"*96",
120"*96",
144"*96",
160"*96"



68 Series Sliding Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+12Ar+5mm clear tempered glass

Standard Size:

72"*80",
96"*80",
108"*96",
120"*96",
144"*96",
160"*96"



100 Series Heavy-duty Sliding Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum



Certified by the NFRC (National Fenestration Rating Council) for energy performance

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+12Ar+5mm clear tempered glass

Standard Size:

72"*80", 96"*80",
108"*96", 120"*96",
144"*96", 160"*96"



120 Series Ultra-slim Sliding Door

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0-4.0mm thickness

Track: Bottom concealed track

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

96"*80",
108"*96",
120"*96",
144"*96",
160"*96"



150 Series Ultra-slim Sliding Door

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 3.0-8.0mm thickness

Track: Bottom track

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

96"*80",
108"*96",
120"*96",
144"*96",
160"*96"



100 Series Heavy-duty Lift-sliding Door

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+12Ar+5mm clear tempered glass

Standard Size:

72"*80",
96"*80",
108"*96",
120"*96",
144"*96",
160"*96"



130 Series Ultra-slim Lift-sliding Door

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0-6.0mm thickness

Track: Bottom concealed track

Glass: 5+27Ar+5mm clear tempered glass

Standard Size:

72"*80",
96"*80",
108"*96",
120"*96",
144"*96",
160"*96"

FOLDING DOOR SERIES



Note:


1. We do not have inventory; all products are custom-made. Production takes approximately 25-30 business days.
2. Our factory supports customizing any profile color and various glass configurations. If you require a different configuration, please contact our experienced sales staff.



WhatsApp
+86 180.2277.5361



WeChat
ID:MiaoFeng2305

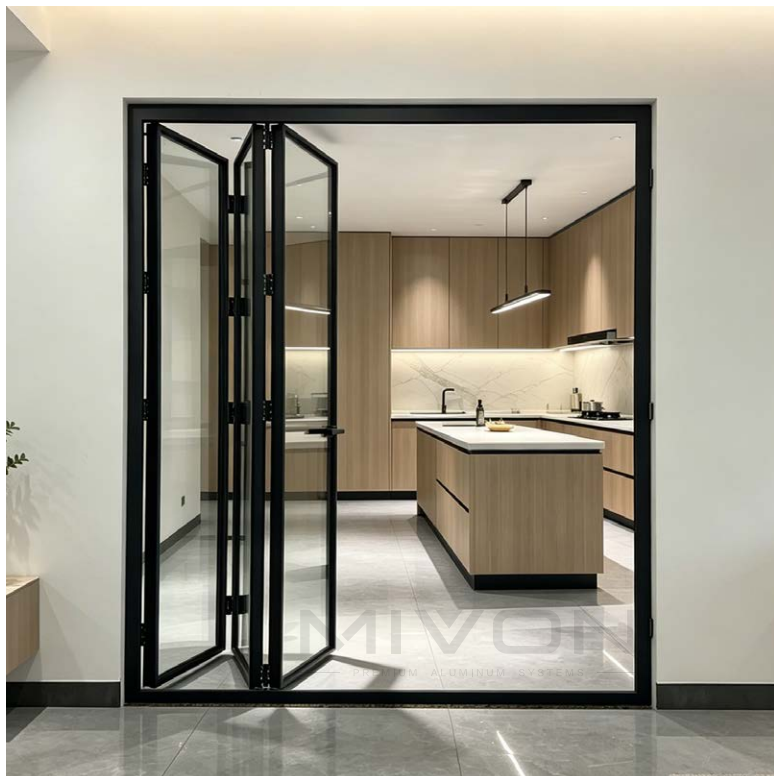

16 Series Ultra-Slim Folding Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Top track or bottom track can be selected

Glass: 8mm clear tempered glass
10mm clear tempered glass
4+1.14PVB+4 laminated tempered glass

Standard Size:

96"*96",
120"*96",
144"*96",
192"*96",
216"*96"



68 Series Folding Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum



Certified by the NFRC (National Fenestration Rating Council) for energy performance

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

96"*96", 120"*96",
144"*96", 192"*96",
216"*96"



73 Series Folding Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+22Ar+5mm clear tempered glass

Standard Size:

96"*96",
120"*96",
144"*96",
192"*96",
216"*96"



75 Series Folding Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

96"*96",
120"*96",
144"*96",
192"*96",
216"*96"



80 Series Heavy-duty Folding Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Track: Bottom track

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

120"*96",

144"*96",

192"*96",

216"*96"

240"*96"



120 Series Heavy-duty Folding Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 3.0mm thickness

Track: Bottom track

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

240"*96",

255.91"*149.61",

275.59"*177.16",

314.96"*196.85",

354.33"*196.85"

HINGED DOOR SERIES



Note:


1. We do not have inventory; all products are custom-made. Production takes approximately 25-30 business days.
2. Our factory supports customizing any profile color and various glass configurations. If you require a different configuration, please contact our experienced sales staff.



WhatsApp
+86 180.2277.5361



WeChat
ID:MiaoFeng2305

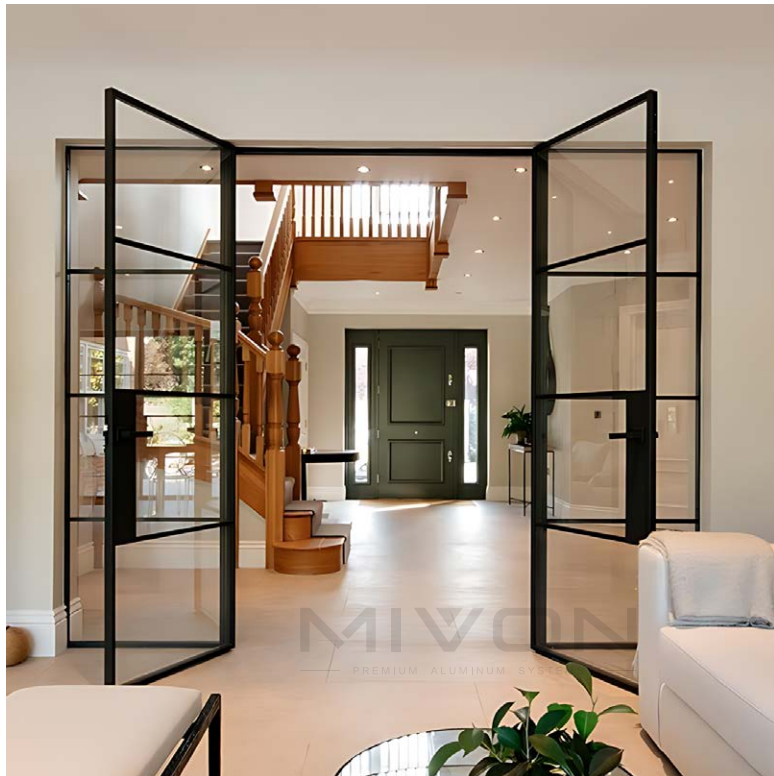

16 Series Ultra-Slim Hinged Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 8mm clear tempered glass

5+12Ar+5mm double-glazed tempered glass

Standard Size:

32"*80", Single door

36"*80", Single door

36"*96", Single door

72"*80", Double Swing

60"*80", Double Swing



30 Series Hinged Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 8mm clear tempered glass

5+12Ar+5mm double-glazed tempered glass

Standard Size:

32"*80", Single door

36"*80", Single door

36"*96", Single door

72"*80", Double Swing

60"*80", Double Swing



73 Series Hinged Door

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+15Ar+5mm double-glazed tempered glass

Standard Size:

32"*80", Single door

36"*80", Single door

36"*96", Single door

72"*80", Double Swing

60"*80", Double Swing



75 Series Hinged Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum



Certified by the NFRC (National Fenestration Rating Council) for energy performance

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

32"*80", Single door

36"*80", Single door

36"*96", Single door

72"*80", Double Swing

60"*80", Double Swing

PIVOT DOOR SERIES



Note:

1. We do not have inventory; all products are custom-made. Production takes approximately 25-30 business days.
2. Our factory supports customizing any profile color and various glass configurations. If you require a different configuration, please contact our experienced sales staff.



WhatsApp
+86 180.2277.5361



WeChat
ID:MiaoFeng2305



18 Series Ultra-Slim Pivot Door

Type: Non-thermal break aluminum


Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 8mm clear tempered glass
5+12Ar+5mm double-glazed tempered glass

Standard Size:

36"*84",
42"*96",
48"*96",
54"*96",
60"*96"

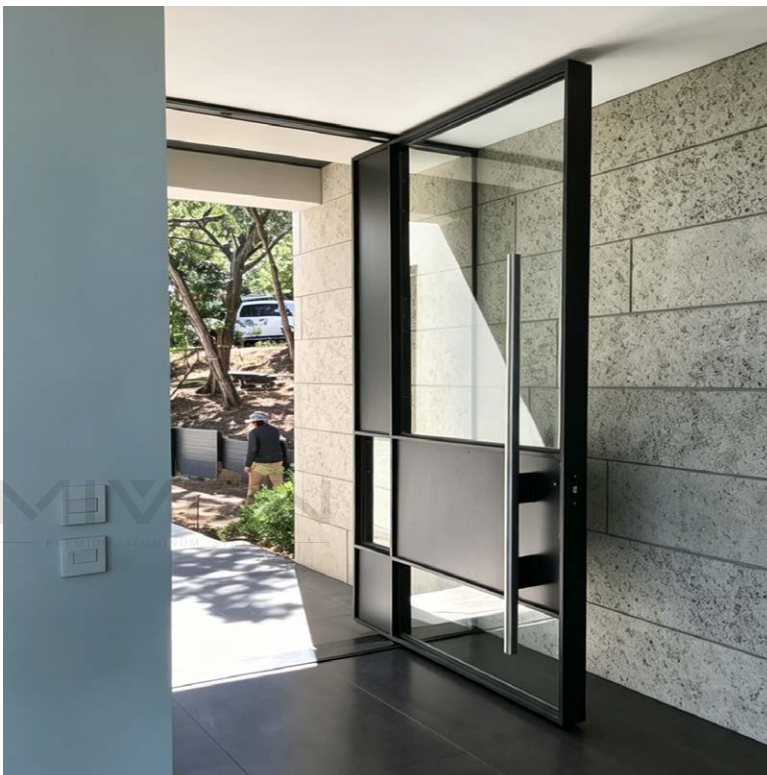

30 Series Pivot Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 3.0mm thickness

Glass: 8mm clear tempered glass
5+12Ar+5mm double-glazed tempered glass

Standard Size:

36"*84",
42"*96",
48"*96",
54"*96",
60"*96"



55 Series Pivot Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0-4.0mm thickness

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

36"×84",

42"×96",

48"×96",

54"×96",

60"×96"



80 Series Heavy-duty Pivot Door

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0-4.0mm thickness

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

36"×84",

42"×96",

48"×96",

54"×96",

60"×96"



120 Series Heavy-duty Pivot Door

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

36"*84",

42"*96",

48"*96",

54"*96",

60"*96"



COMMERCIAL STORE FRONT DOOR SERIES



Note:

1. We do not have inventory; all products are custom-made. Production takes approximately 25-30 business days.
2. Our factory supports customizing any profile color and various glass configurations. If you require a different configuration, please contact our experienced sales staff.



WhatsApp
+86 180.2277.5361



WeChat
ID:MiaoFeng2305



55 Series Commercial Storefront Doors

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

36"*84",

42"*84",

72"*84",

84"*96",

96"*96"



80 Series Commercial Storefront Doors

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0-2.5mm thickness

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

36"*84",

42"*84",

72"*84",

84"*96",

96"*96"

COMMERCIAL AUTOMATIC SLIDING DOOR SERIES



Note:

1. We do not have inventory; all products are custom-made. Production takes approximately 25-30 business days.
2. Our factory supports customizing any profile color and various glass configurations. If you require a different configuration, please contact our experienced sales staff.



WhatsApp
+86 180.2277.5361



WeChat
ID:MiaoFeng2305



Frameless Glass Automatic Sliding Door

Type: Non-thermal break aluminum


Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 10mm clear tempered glass
5+0.76pvb+5mm tempered glass

Standard Size:

48"*84",
60"*84",
72"*84",
84"*92",
96"*92"

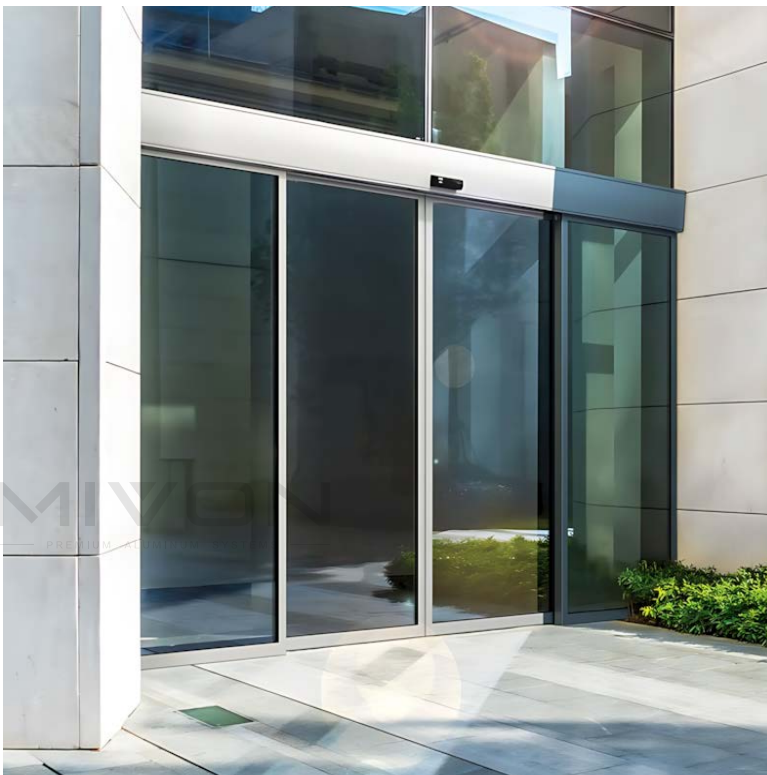

18 Series Ultra-slim Automatic Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 8mm clear tempered glass

Standard Size:

48"*84",
60"*84",
72"*84",
84"*92",
96"*92"



55 Series Automatic Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+9Ar+5mm clear tempered glass

Standard Size:

72"*84",
84"*92",
96"*92",
120"*92",
144"*92",
168"*92"



80 Series Automatic Door

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+9Ar+5mm clear tempered glass

Standard Size:

72"*84",
84"*92",
96"*92",
120"*92",
144"*92",
168"*92"

WINDOWS SERIES



Note:

1. We do not have inventory; all products are custom-made. Production takes approximately 25-30 business days.
2. Our factory supports customizing any profile color and various glass configurations. If you require a different configuration, please contact our experienced sales staff.



WhatsApp
+86 180.2277.5361



WeChat
ID:MiaoFeng2305



110 Series Casement Windows

Type: Thermal break aluminum



Certified by the NFRC (National Fenestration Rating Council) for energy performance

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness


Glass: 5+20Ar+5mm clear tempered glass

Standard Size:

30"*60", 32"*60",

36"*60", 36"*72",

48"*60", 60"*60"

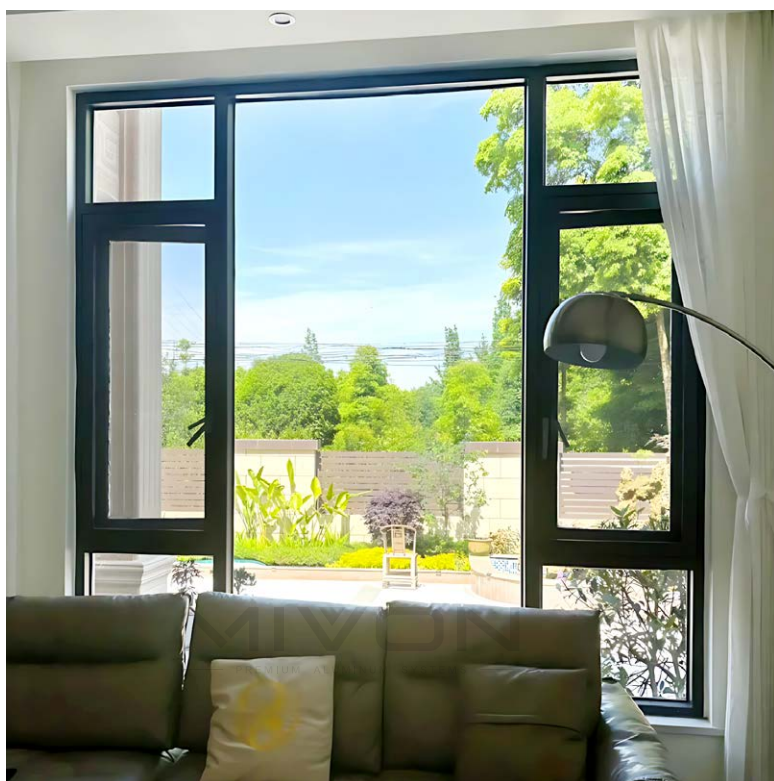

120 Series Casement Windows

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+20Ar+5mm clear tempered glass

Standard Size:

30"*60",

32"*60",

36"*60",

36"*72",

48"*60",

60"*60"



120 Series Sliding Windows

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+12Ar+5mm clear tempered glass

Standard Size:

48"×36",
32"×60",
36"×60",
36"×72",
48"×60",
60"×60"



128 Series Sliding Windows

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+15Ar+5mm clear tempered glass

Standard Size:

48"×36",
32"×60",
36"×60",
36"×72",
48"×60",
60"×60"



110 Series Awning Windows

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+20Ar+5mm clear tempered glass

Standard Size:

30"*60",

32"*60",

36"*60",

36"*72",

48"*60",

60"*60"



110 Series Tilt And Turn Window

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+20Ar+5mm clear tempered glass

Standard Size:

30"*60",

32"*60",

36"*60",

36"*72",

48"*60",

60"*60"



75 Series Folding Window

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+15Ar+5mm clear tempered glass

Standard Size:

60"*44",
72"*44",
84"*44",
96"*44",
72"*48",
96"*48"



Gas Strut Window

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+25Ar+5mm clear tempered glass

Standard Size:

24"*18",
30"*24",
36"*24",
48"*24",
48"*36",
60"*24"



Single Double Hung Window

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+20Ar+5mm clear tempered glass

Standard Size:

24"*36",

28"*48",

32"*48",

32"*60",

36"*48",

36"*60



Special-shaped Window Customizable

Type: Non-thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+20Ar+5mm clear tempered glass

Standard Size:

24"*24",

30"*30",

36"*36",

42"*42",

48"*48



Picture Window

Type: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+20Ar+5mm clear tempered glass

Standard Size:

20"*20",
24"*36",
36"*36",
48"*60",
60"*60",
72"*48",
96"*72"



Skylight

Type1: Non-thermal break aluminum

Type2: Thermal break aluminum

Application Parameters

Material: 6063-T5 aluminum, 2.0mm thickness

Glass: 5+ 15Ar + 5+ 1.14pvb+ 5mm tempered glass

Standard Size:

21"*26 7/8", Fixed Skylight
21"*45 3/4", Fixed Skylight
30 1/16"*37 7/8", Fixed Skylight
30 1/16"*45 3/4", Fixed Skylight
22 1/2"*22 1/2", Flat roof
30 1/2"*30 1/2", Flat roof
46 1/2"*46 1/2", Flat roof

Standard Color Configuration

Other colors can be customized upon request, RAL color number is required



Matte black




Sand gray




Glossy white

Glass Type

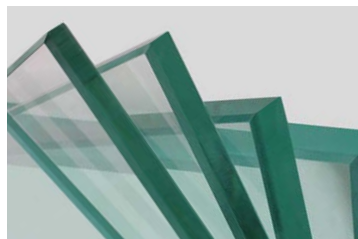

Single tempered glass

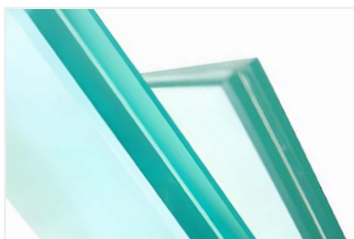

Laminated tempered glass



IGU Tempered Glass
With Argon Gas

Custom sizes and colors are available.

Please consult our sales staff for a specific quote.



Foshan Miaofeng Building Materials Co., Ltd.

Tel: +86 180.2277.5361

Company Email: zeck@miaofengwindows.com

Address: Shishan Town, Nanhai District, Foshan City

